



# CirPark

## SOLUTIONS FOR EFFICIENT PARKING

Product Catalogue 2024

# CirPark Platform 4

CirPark Software

Cosmos

# iPark 10

Guidance System

Counting System

Find Your Car

# LEDPark 32

Regulated LED lighting

Energy Efficiency

# EVPark 38

EV Chargers

DLM

Park & Charge

PMS Integrations

CPMS Integrations



# CirPark Platform

The CirPark Platform is a comprehensive solution that effectively manages various systems from a single centralized location, offering a range of features to parking operators. With its Scada software and third-party integration capabilities, it provides a multi-platform and mobile-oriented software infrastructure.

CirPark enables vehicle counting, parking guidance systems, and a convenient “find your car” feature from iPark. It also incorporates regulated LED lighting and energy-efficient solutions from LEDPark, along with EV chargers, Park&Charge options, and integrations with Parking Management Systems and Charge Point Management Systems from EVPark. This unique platform significantly enhances parking mobility, illumination, and security while providing comprehensive e-mobility solutions.

## iPark

Intelligent Parking Guidance System including Single Space Detection and/or Area & Level Counting, Find your Car solution and Outdoor Guidance.



Guidance System



Counting System



Find Your Car



Video Surveillance

## LEDPark

Efficient and low consumption Led Lighting System including Lighting Regulation and Energy Monitoring System (EMS) for Parkings.



Led Park



Energy Efficiency

## EVPark

Electric Vehicle Charging System for Indoor and Outdoor Parkings.



Electric vehicle chargers



OCPP



DLM



Park&Charge



Parking Management System integration



Charge Point Operator integration



# CirPark Platform

The CirPark Platform is a comprehensive solution that centrally manages various systems, benefiting parking operators. With Scada software and third-party integration, it offers a mobile-oriented infrastructure. CirPark includes vehicle counting, parking guidance, and “find your car” features. It integrates LEDPark’s LED lighting and energy-efficient solutions, as well as EVPark’s EV chargers and integrations with Parking and Charge Point Management Systems. This platform enhances parking mobility, illumination, security, and e-mobility solutions.



## LOCAL PLATFORM



CirPark Scada  
Software



XML API  
Application Protocol Interface  
open for integrators.

## CLOUD PLATFORM



COSMOS  
Cloud based Platform



COSMOS API  
API for integrators/operators



# CirPark Software

CirPark Dynamic Software offers a real-time management of all Efficient Parking products which are iPark (counting, indoor/outdoor guidance and vehicle localization), LEDPark (regulated lighting control and energy efficiency) and EVPark (control of electric vehicle charging equipments).



## CirPark Scada Software

CirPark Scada Software allows real-time management of all Cirpark products:

**iPark:** counting, indoor/outdoor guidance and vehicle location.


**LEDPark:** regulated lighting control and energy efficiency.

**EVPark:** control of electric vehicle charging equipments.

It allows controlling the occupation, introducing a map of the installation, and creating visualization screens of the occupancy, crossing zones, statistics, reports and logic of operation and alarms.

**Multiclient and cross-platform software.** Connection via multiplatform web browser or through Windows O.S. program. Integration via XML API. Mail server and RSS. Monitoring of IP cameras. Integration and monitoring of third party system using API. License for unlimited number of parking spaces.



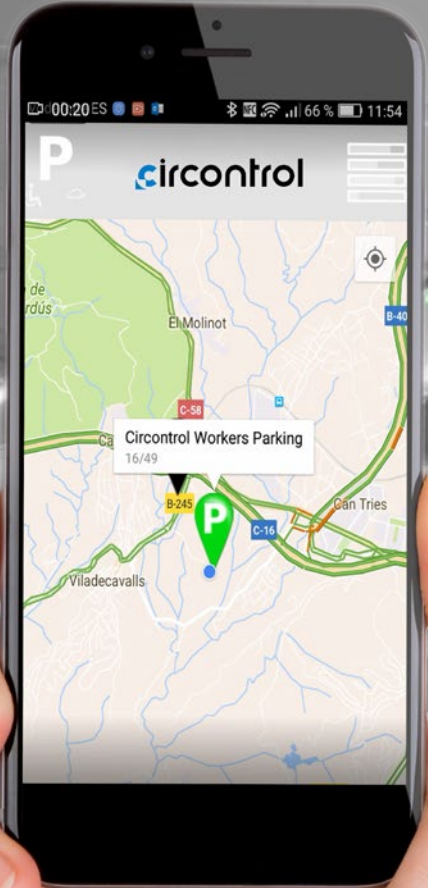

# COSMOS

Use the cosmos API to create, customize, and deploy your own mobile app.





### CirGateway

Service installed in each parking that is in charge of sending all required data to CirCloud.




### COSMOS

Cosmos is a cloud-based platform that collects data to monitor and report on a range of Electric Vehicle charging points.



### Cloud API

API for integrators / operators

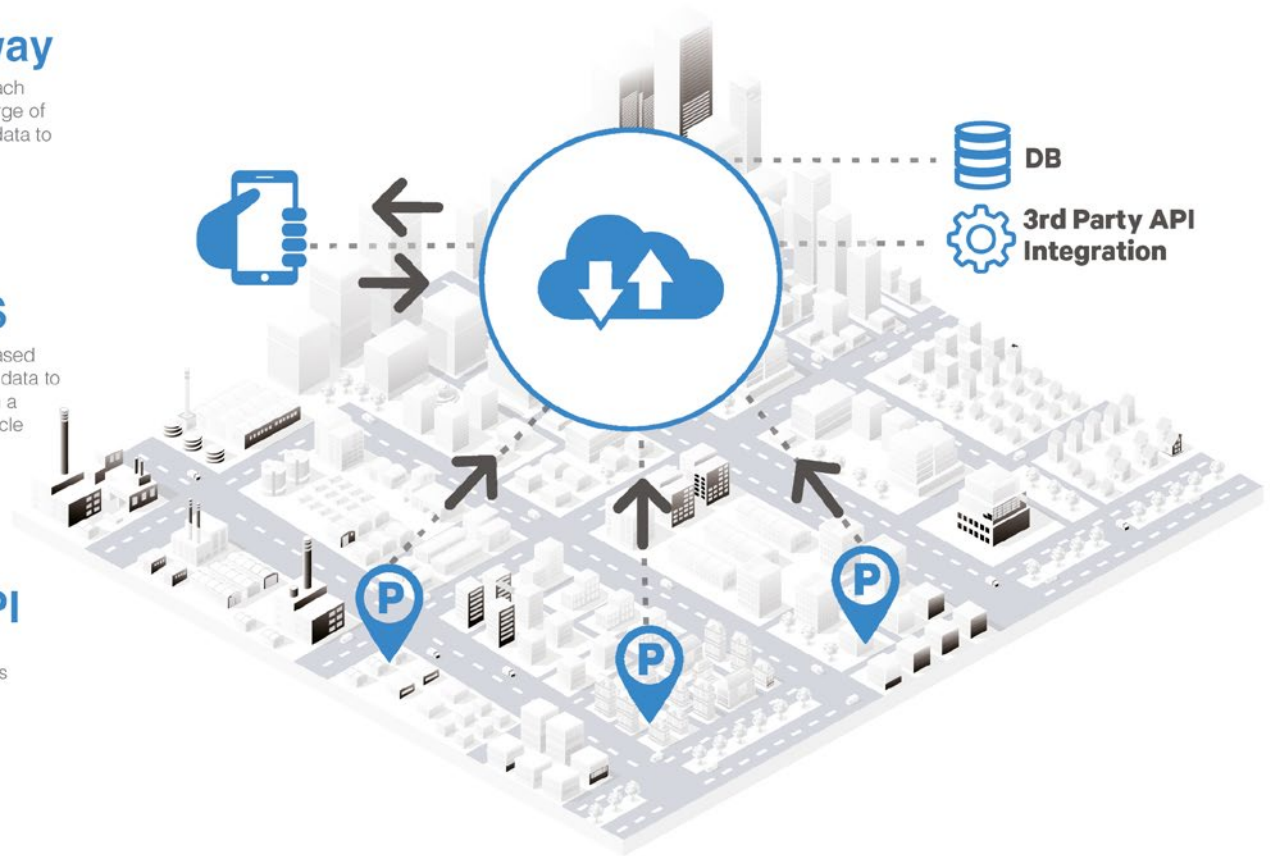

With CirCloud Platform you can access and manage data received from all car parks that use Circontrol technology.





# iPark

iPark is one of the most impressive and long-lasting systems on the market for Guidance, Find Your Car and Counting Systems. Integrated within the CirPark Platform, it becomes a powerful management tool that optimises the traffic in car parks and provides user satisfaction, giving them the information they need, when they need it. Operators, on the other hand, have an excellent tool to gain the loyalty of their customers, optimise traffic and occupancy, and reduce maintenance and operation.





## Guidance System

Indoor/Outdoor Dynamic Guidance system that manages the user information in order to optimise the occupancy and traffic of the parking facilities. Ultimate technology sensors and panels, plug&play and long-lasting. Worldwide product range oriented.



## Find Your Car

Powerful system able to provide car-finding solutions based on License Plate Recognition within lanes or in each parking space, offering users the location and route to their own car via the user application.



## Counting System

Level & Area counting system with full range of detectors and panel display information for Indoor & Outdoor parking facilities.

# Guidance system

Optimises traffic in car parks and provides user satisfaction by giving them the information they need

## Owner Benefits


- Customer Loyalty and Car Park reputation.
- Efficient Traffic and Occupancy management.
- Operational and Maintenance Reduction costs.
- Full remote control system with auto-pilot operability.
- Completely customizable Reports, RealTime Screens and HeatMaps.
- Manage Guidance, Illumination & EVChargers from one site.

## Customer Benefits

- Less time spent on locating free parking spaces.
- Less stress and increased ease of parking.
- Easy Location of Handicapped, EVCharge & Reserved places.

## Sensors

Front-End Bay Sensor  
INDOOR



Centre Bay Sensor  
INDOOR



Camera based sensor  
INDOOR



Outdoor guidance  
OUTDOOR



## Displays


VMS Range  
INDOOR



RGB Range  
INDOOR / OUTDOOR



Panel Parking  
INDOOR/OUTDOOR





## Control

Converter  
INDOOR / OUTDOOR



License  
INDOOR / OUTDOOR



Server  
INDOOR / OUTDOOR



## Accessories

Wiring  
INDOOR



Fixing Elements  
INDOOR



# iPark / Guidance System / Sensors

## Front End Sensors

TRIOLOGY  
460315T



Ultrasonic Sensor RGB LED indicator and LED lighting system for the detection and indication of the occupation status and for a courtesy lighting of the parking space. High brightness RGB LED indicator Power: 24/48 Vdc. Consumption: 5 W. Communications: RS-485. It has connector for Power+Data. Extended Temperature Range -20 to 60°C. Remote Configurable Firmware. Sensing distance and brightness intensity adjustable by software. Recommended installation height between 2.2 and 2.4 meters. IP54 Protection.

BILOGY  
460313T



Ultrasonic Sensor and RGB LED indicator for the detection and indication of the occupancy status of the parking space. High brightness RGB LED indicator Power: 24/48 Vdc. Consumption: 1.5 W. Communications: RS-485. It has connector for Power+data. Extended Temperature Range -20 to 60°C. Remote Configurable Firmware. Sensing distance and brightness intensity adjustable by software. Recommended installation height between 2.2 and 2.4 meters. IP54 Protection.

## Centre of Bay Sensor+Indicator

SP3-RG  
460128





Ultrasonic sensor and Indicator light on the same equipment, for the detection and indication of occupancy status of the parking space. Power+data Connector and external light connector. Power supply: 24 Vdc. Consumption: 1.2 W. Communications: RS-485. Extended Temperature Range -10 to 50°C. Remote Configurable Firmware. Recommended installation height between 2 and 3 meters. Detection distance adjustable by software. It has Red-Green LED indicator.

SP3-RB  
460129



Ultrasonic sensor and Indicator light on the same equipment, for the detection and indication of occupancy status of the parking space. Power+data Connector and external light connector. Power supply: 24 Vdc. Consumption: 1.2 W. Communications: RS-485. Extended Temperature Range -10 to 50°C. Remote Configurable Firmware. Recommended installation height between 2 and 3 meters. Detection distance adjustable by software. It has Red-Blue indicator.

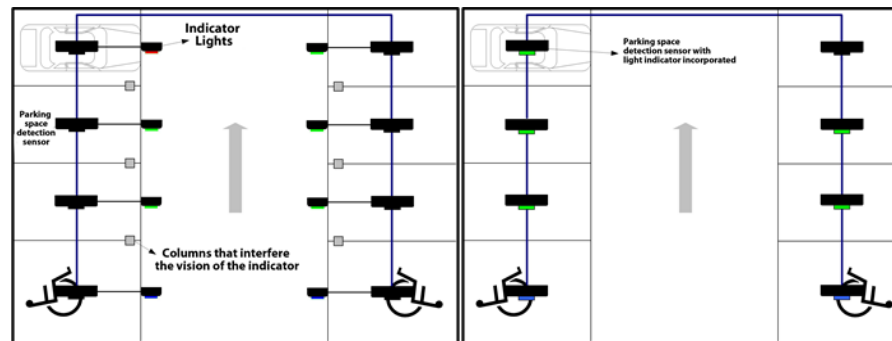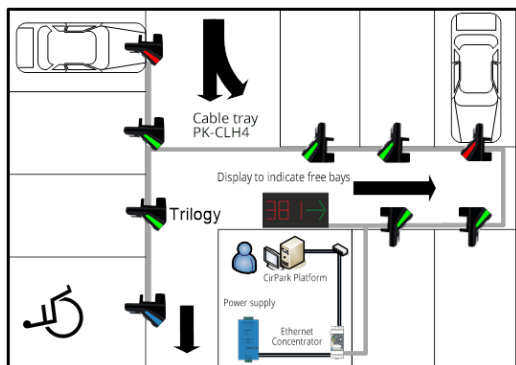

# Camera based sensor

**KSENSOR**  
460810



Camera-based sensor with a built-in indicator that arises from the need to integrate in a sensor device the image recognition technology thanks to the use of its two integrated cameras. Power Supply: DC 48V PoE Consumption: 5W Communications: Ethernet (RJ45) Extended Temperature Range -20 °C to +60 °C Remote configurable Firmware. Recommended Installation height between 2.2 and 2.5 meters. IP50 Protection.

**KSENSOR C1**  
460810C1





Camera-based sensor with a built-in indicator that arises from the need to integrate in a sensor device the image recognition technology thanks to the use of its one integrated camera. Power Supply: DC 48V PoE Consumption: 5W Communications: Ethernet (RJ45) Extended Temperature Range -20 °C to +60 °C Remote configurable Firmware. Recommended Installation height between 2.2 and 2.5 meters. IP50 Protection.

**FALCON**  
460835



Outdoor camera to detect vehicles in parking areas individually. Power Supply: DC 12V PoE Consumption: 8.5W Communications: Ethernet (RJ45) Extended Temperature Range -30 °C to +60 °C Remote configurable. Recommended Installation height: 10 meters. IP67 Protection.

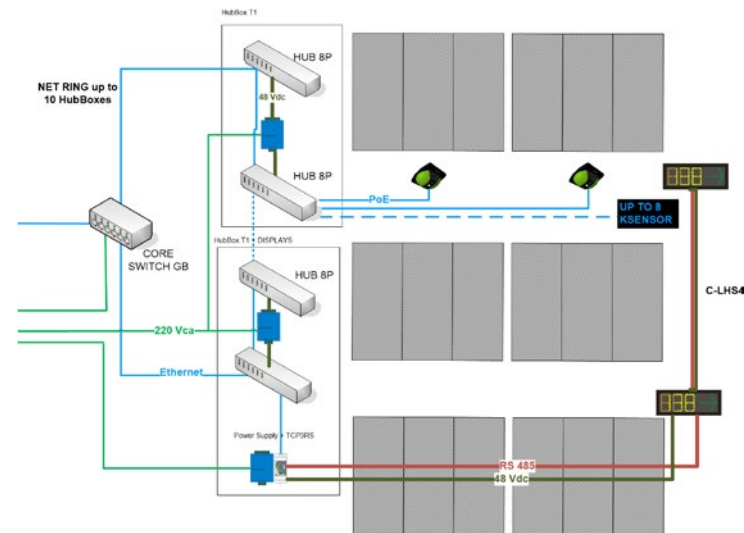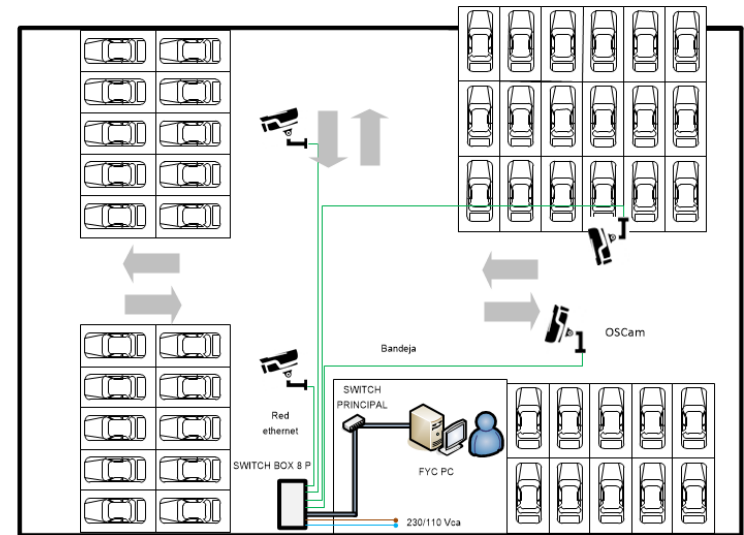

# iPark / Guidance System / Displays

## VMS Indoor/Outdoor Displays

VMS-125-8M  
460828



Indoor/Outdoor display in configuration [‘P’ symbol + 4 digits + Cross/Arrow]. RGB LED Matrix. Customizable Symbol by software. Text of 8 characters or scroll up to 15. Power: 24/48 Vdc. Consumption 22W. Communication: RS-485. Brightness intensity adjustable by software. Digit height 128 mm. Dimensions (H x W x D): 128 x 512 x 76 mm

VMS-200-4M  
460829



Indoor/Outdoor display in configuration [3 digits + Cross/Arrow or 4 digits]. RGB LED Matrix. Customizable Symbol by software. Text of 4 characters or scroll up to 15. Power: 24/48 Vdc. Consumption 35W (Max.) Communication: RS-485. Brightness intensity adjustable by software. Digit height 192 mm. Dimensions (H x W x D): 192 x 384 x 78 mm

## RGB Indoor Display

DX3-RGB  
460666



Indoor display in mode: [3 digits + Cross/Arrow]. RGB LEDs with 120° angle. 8 predefined digit colors. Digit height 125 mm. Right / Left and Up / Down controllable arrow. Arrow: Green/Red and Cross: Red. Indication of free places and address. Display “FULL” or “000 Arrow/Cross”. Power supply: 48-24 Vdc. Maximum consumption: 18 W. Communications: RS-485. Dimensions: 404 x 165,23 x 39 mm. Stock on demand.

## RGB Outdoor Display

DX3-RGB-O  
460666-O



Outdoor display with [3 digits + Cross/Arrow]. RGB LEDs with 120° angle. 8 predefined digit colors. Digit height 125 mm. Right / Left and Up / Down controllable arrow. Arrow: Green/Red and Cross: Red. Indication of free places and address. Display “FULL” or “000 Arrow/Cross”. Power supply: 110-220 Vac +/- 15%. Maximum consumption: 18 W. Communications: RS-485. Dimensions: 404 x 165,23 x 39 mm. IP54. Stock available.



# iPark / Guidance System / Outdoor Displays

## Panel Parking

Display SPACES / FULL  
460808-EN/ES/FR/  
CAT



Display LED outdoor Text available in 4 languages: English (SPACES/FULL), French (LIBRE/COMPLET), Spanish (LIBRE/COMPLETO) and Catalan (LLIURE/COMPLET). LED 5mm. Colours: green/red. Digit height: 82mm. Input power: 230 V 50Hz.

Dimensions: 750 x 250 x 100mm

English 460808-EN

Spanish 460808-ES

French 460808-FR

Catalan 460808-CAT

Panel Parking 'P' with  
SPACES / FULL display  
460807-EN/ES/FR/  
CAT



Panel Parking 'P'with OPEN/CLOSED display.

Structured made off 2 mm aluminium plate. Folded and welded, painted in textured black epoxy. Backlight by LED. Dimensions: 1200mm x 940mm x 130mm. Available in 4 languages: English (SPACES/FULL), French (LIBRE/COMPLET), Spanish (LIBRE/COMPLETO) and Catalan (LLIURE/COMPLET). 6mm front antivandal polycarbonate with translucent vinyl labelling. Window with display visualization and solar protection film.

English 460807-EN

Spanish 460807-ES


French 460807-FR

Catalan 460807-CAT

Panel Parking  
460187

Panel with information about the capacity of the car park, per floor or overall. 2-3-4 digit displays.

Panel with information about the capacity of the car park, per floor or overall. 2-3-4 digit displays. Advanced, Basic and Outdoor Displays. Communication: RS-485. Digit colour: RGB or Red. Brightness intensity adjustable by software.

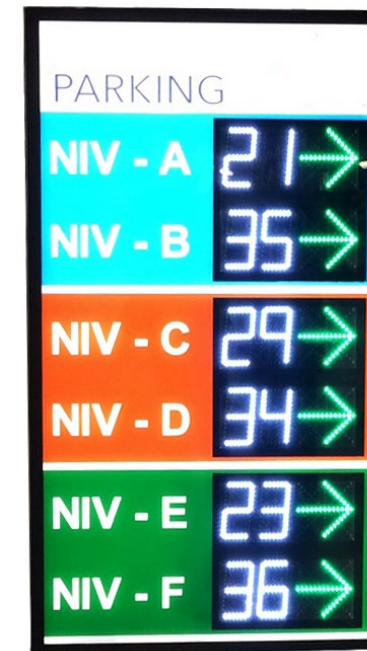

# iPark / Guidance System / Control

## Gateways & Controllers

TCP3RS  
460803

Industrial RS-485 to TCP-IP Ethernet communication converter. RS-232/RS-485 opto-isolated port. Input power: 230 V AC. Consumption: 2 VA. DIN rail.



## Server with built-in license



Computer Equipment for CirPark systems. Standard PC. Intel Core i3 10th gen. 8GB RAM memory. 256 GB Solid-State Drive. O.S windows Win10 Pro. Customized work desktop, users, protections and language.

PK-CPU+Soft CirPark EN  
610206-EN

PK-CPU+Soft CirPark ES  
610206-ES

PK-CPU+Soft CirPark 1K EN  
610206-1K-EN

PK-CPU+Soft CirPark 1K ES  
610206-1K-ES

PK-CPU+Soft CirPark LT EN  
610206-LT-EN

PK-CPU+Soft CirPark LT ES  
610206-LT-ES

## Software Licenses

CirPark Scada  
610105

Car park management Scada software. Full version.

CirPark Scada  
Software 1000 Bays  
610105-1K

Car park management Scada software. Limited to 1000 parking spaces.

CirPark Scada  
Software LT  
610111

Car park management Scada software. Limited to parkings with no Single Bay Sensor Guidance.



# Accessories

PK-TFT  
460204

TFT 22" Wide Screen with high resolution



PK-SWITCH 8P  
460205G

Gigabit Switch 8 ports 10/100/1000 Mbps

PK-SWITCH 16P  
460206G

Gigabit Switch 16 ports 10/100/1000 Mbps



FYC-HUB8POE  
460703

Ethernet Signal Concentrator for a maximum group of 48 parking spaces with 8 Ksensors. Includes an industrial PoE switch for the group of Ksensors.



PSC-240-24  
200520

Switched power supply. Input power: 230 V AC. Output voltage: 24 V DC. Power: 240 W. DIN rail.





PSC-240-48  
200526

Switched power supply. Input power: 230 V AC. Output voltage: 48 V DC. Power: 240 W. DIN rail.



PSC-480-48  
460224

Switched power supply. Input power: 230 V AC. Output voltage: 48 V DC. Power: 480 W. DIN rail.

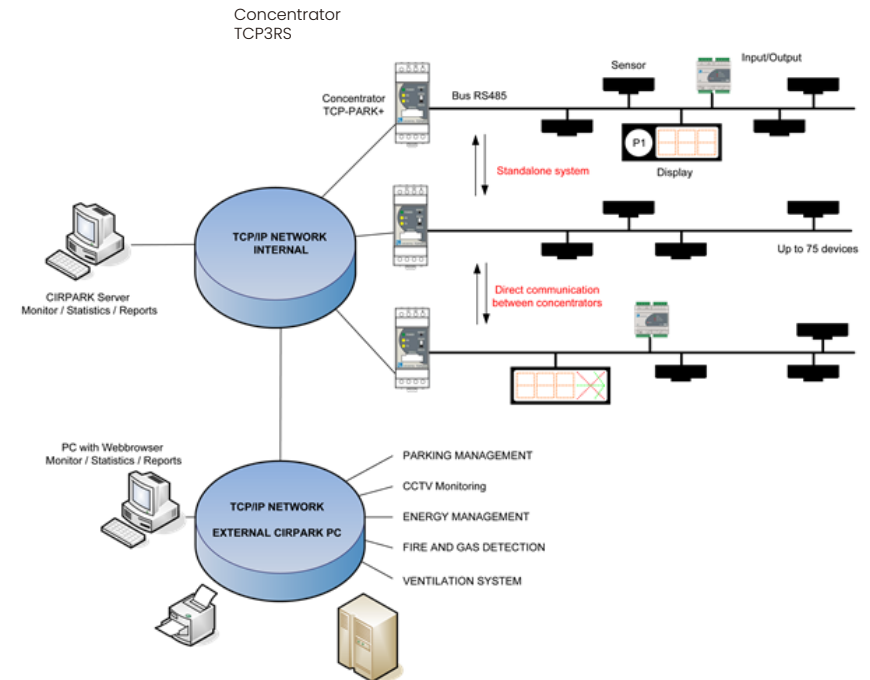
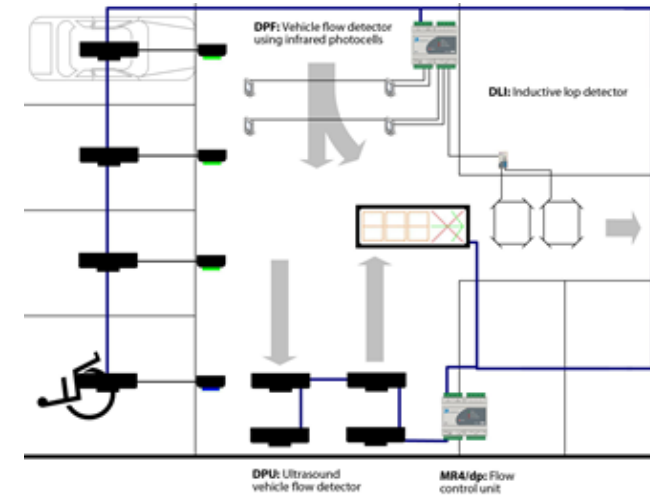


# iPark / Guidance System / Accesories

## Guidance Accesories

PK-CLIP-1000ud  
460161

Sturdy clip for securing the SP series sensors and indicator lights. For clamping in metal tray or pk-socket accessory. 1000 pcs bag

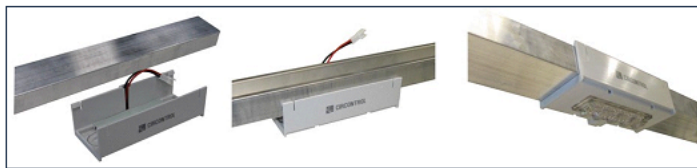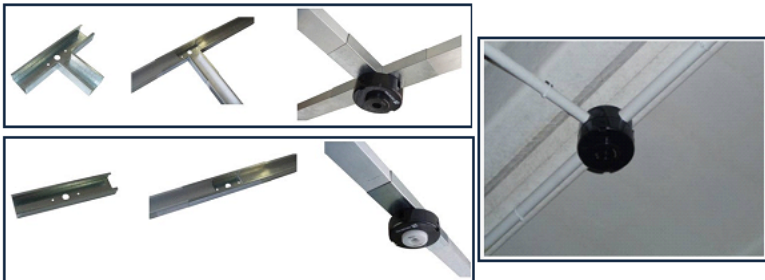

## Fixings

PK-SOCKET -  
KSENSOR  
460285

Polycarbonate socket for Ksensor and Ksensor C1 pipe installations. 25-mm tube for ethernet cable.



PK-SOCKET BI  
BILOGY/TRILOGY  
460287

Polycarbonate socket for Bilogy and Trilogy pipe installations. 25-mm tube for connecting sensors.



PK-SOCKET  
460159

Polycarbonate socket for SP3 and DPU pipe installations, 25-mm tube for connecting sensors and 20-mm tube for connecting the light indicator sensor.



PK-TPPx  
460173

Black plastic accessory for mounting the space indicator PPx.



PK-CP245  
460170

Blind aluminium tray, 48 mm wide and 2.45 m long.



PK-CP80T  
460686

Galvanised-steel accessory to cover the tray. External clip subjection. Openings to introduce the equipment cables inside the tray. 80cm long.





## Wiring

PK-CP050  
460171



Blind aluminium tray, 48 mm wide and 0.5 m long.

PK-CP50T  
460691



Galvanised-steel tray cover. External clip subsection. Openings to introduce the equipment cables inside the tray. 50cm long. Used for the Front End sensors bilogy or trilogy.

PK-PUC  
460176



Galvanised-steel accessory for attaching the channel to the ceiling.

PK-G  
460687



Galvanised-steel accessory in a G shape for attaching the channel to the ceiling. Holds the tray for the outside making the installation faster an easier.

PK-E  
460175



Galvanised-steel accessory for joining trays.

PK-C  
460174



Galvanised-steel accessory at a 90° angle.

PK-TSS  
460172



T-shaped galvanised-steel accessory to install the SP sensor series.

PK-ESS  
460179



Galvanised-steel accessory to install the SP sensor series. Used at the end of a tray line.

C-LHS4  
460115



3-m halogen-free hose-cable, to connect sensors of SP series, Bilogy or Trilogy. 2 x 1.5 mm<sup>2</sup> power cable + 2 x 0.34 mm<sup>2</sup> twisted and shielded cable for the RS-485 bus.  
*\*Other lenghts available under request*

C-SS4-T  
460152




3-m halogen-free hose-cable, to connect sensors of SP series, Bilogy or Trilogy. 2 x 1.5 mm<sup>2</sup> power cable + 2 x 0.34 mm<sup>2</sup> twisted and shielded cable for the RS-485 bus. Specially designed for installation inside a tube.  
*\*Other lenghts available under request*

C-LHP3  
460116



3-m halogen-free hose-cable, for the connection between SP sensor series and its own indicator. 3 x 0.75 mm<sup>2</sup>.  
*\*Other lenghts available under request*

C-LH4  
460117



100-m halogen-free hose-cable extending the row of devices. 2 x 1.5 mm<sup>2</sup> power cable + 2 x 0.34 mm<sup>2</sup> twisted and shielded cable for the RS-485 bus.

C-DD40-P  
460293



40cm halogen-free hose-cable, to connect displays internally inside Panel parking. 2 x 1.5 mm<sup>2</sup> power cable + 2 x 0.34 mm<sup>2</sup> twisted and shielded cable for the RS-485 bus.

Cable Cat.5e/6  
(305mts)  
230003



305-m UTP communication cable, category 5. Unshielded cable, four twisted pairs WG26.



# Counting system

Level & Area counting system with full range of detectors and information panels for Indoor & Outdoor parking facilities.

This system offers 3 different types of detection to control the access into different areas with reduced equipment and high levels of accuracy.

It includes Autonomous Control Units to automatize the counting and control of any area. This is possible with embedded CirPark Scada that makes this system smart.

## Detectors

Inductive Loop Detectors  
INDOOR/OUTDOOR



Photocell crossing-zone Detectors  
INDOOR/OUTDOOR



Ultrasonic crossing-zone Detectors  
INDOOR/OUTDOOR



## Displays

VMS Range  
INDOOR



RGB Range  
INDOOR / OUTDOOR



High Luminosity Range  
OUTDOOR



Panel Parking  
OUTDOOR



# Control

Control Unit for crossing-zone detectors  
INDOOR/ OUTDOOR





Server  
INDOOR/ OUTDOOR



Converter  
INDOOR/ OUTDOOR



License  
INDOOR/ OUTDOOR

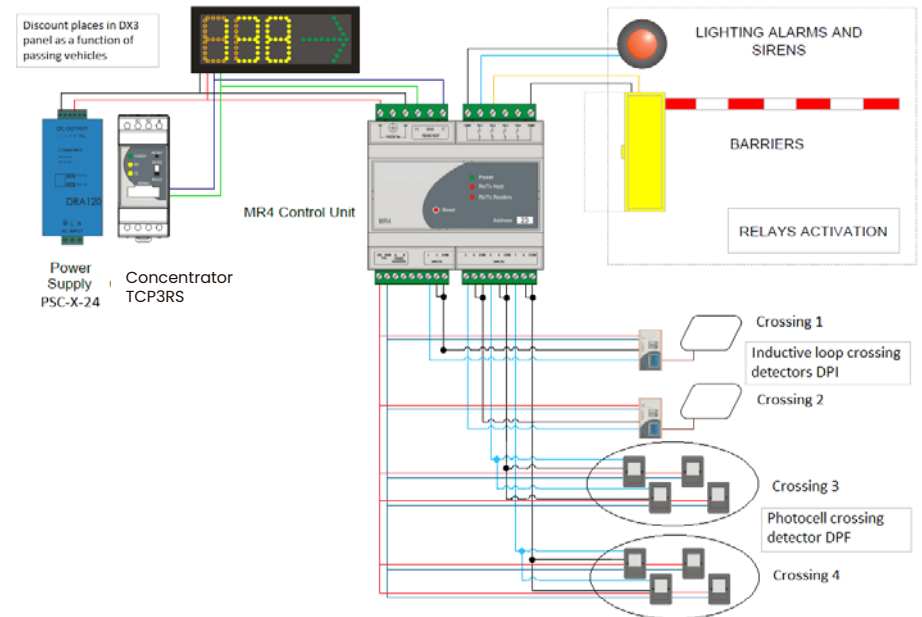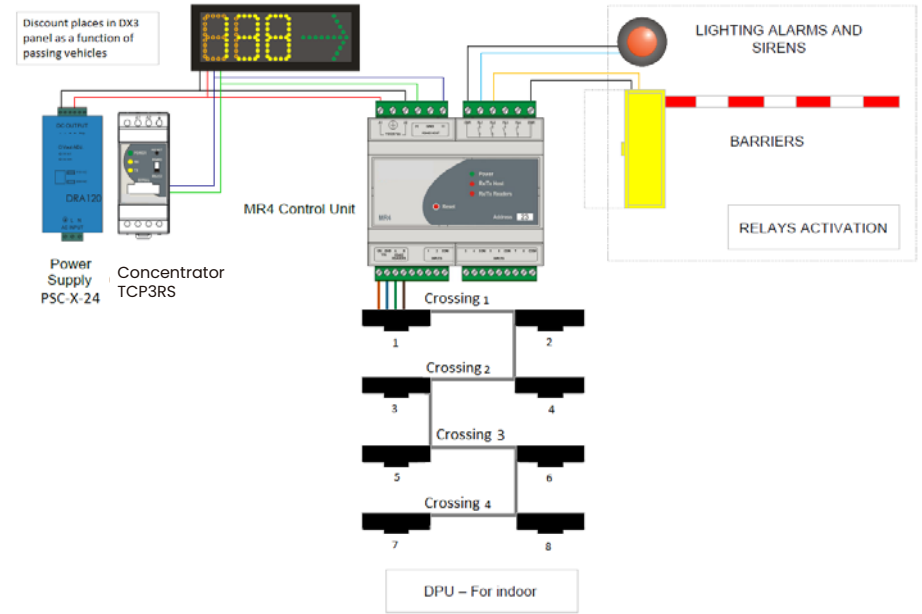

# iPark / Counting System

## Detectors

MR4/dp-48  
460804



**Vehicle counting equipment.** Control unit for inductive loop, photocell or DPU pass detectors. Power supply: 24/48 Vdc. Consumption: 1 W + (Number of zones x 1,6 W). Communications via RS-485. 8 digital inputs for control of up to 4 pass-zones. Additional RS-485 input for control of up to 4 DPU. Incorporates 4 relay outputs for automation, depending on the occupation. Storage memory for the 4 pass-zone counters. Auxiliar output: 24 Vdc

DPF  
460114



**Vehicle flow detector using infrared photocells.** Set of two modules with two photocells each (transmitter-receiver). Input power: 24 V DC. Activation by digital input in MR4/dp. Powered directly from MR4/dp-48.

DPU  
460133



**Ultrasound vehicle flow detector.** Set of two ultrasound sensors. 24 V DC input power. Consumption: 2 x 0.8 W. Communication: RS-485 with MR4/dp. Socket for installation in tube included. Powered directly from MR4/dp-48.

DLI-24  
460219



**Inductive loop detector.** Input power: 24 VDC. Consumption: 1.5 VA. Control with one inductive loop. Activates a relay when a detecting a metal mass on the loop. Possibility of adjusting the sensitivity. Adjustable pulse type, during or after detection. Powered directly from MR4/dp-48.

DLI-PARK-24  
460220



**Inductive loop detector.** Input power: 24 VDC. Consumption: 1.5 VA. Control of two inductive loops. Activates a relay when detecting a metal mass on the loop. Possibility of adjusting the sensitivity. Adjustable pulse type, during or after detection. Powered directly from MR4/dp-48.



# Panel Parking

Panel Parking  
460187




Panel with information about the capacity of the car park, per floor or overall. 2-3-4 digit displays. Consumption: 2.5 - 4 W per panel. Communication: RS-485. Digit colour: amber - red. Brightness intensity adjustable by software.

- 24/48 Vdc if TCP3RS is located outside
- 220 Vac if TCP3RS is located inside

# Control & Software

TCP3RS  
460803

Industrial RS-485 to TCP-IP Ethernet communication converter. RS-232/RS-485 opto-isolated port. Input power: 230 V AC. Consumption: 2 VA. DIN rail.

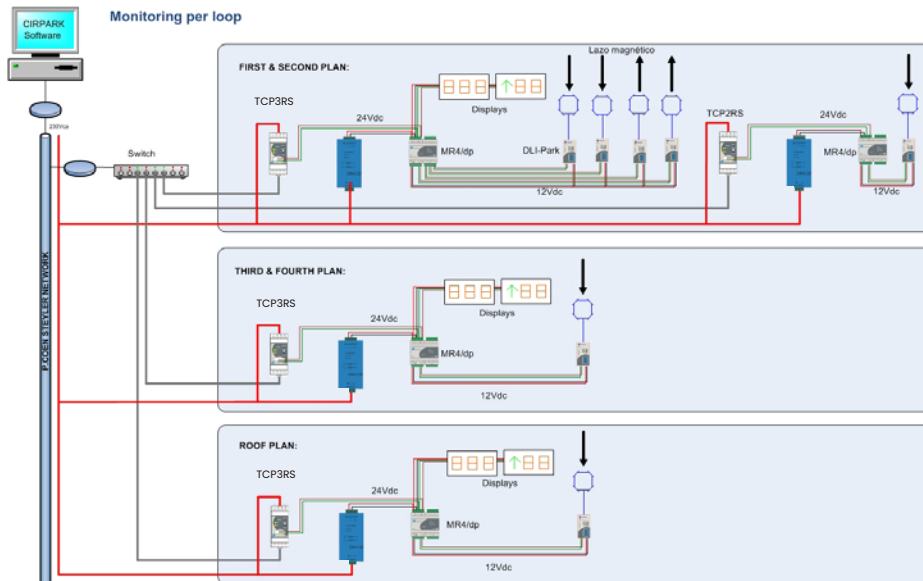



## Find Your Car

Powerful system able to provide car-finding solutions based on QR Code or License Plate Recognition within lanes or in each parking space, offering users the location and route to their own car via the user application.

### Features

**License Plate Recognition** by lane or within defined zones in small parkings to facilitate user's car location.

**Car Recognition** within each special parking space, such as EV charging spaces or reserved VIP bays.

Combining **Find Your Car** with **CirPark Guidance System** provides a car location service with great reliability.

### Cameras

Ksensor  
INDOOR



Lane Cameras  
INDOOR/OUTDOOR



### Terminal

Kiosk User Interface  
INDOOR



# Control

Switch POE  
INDOOR




Main Gigabit Ethernet Switch  
INDOOR



Server  
INDOOR



License  
INDOOR

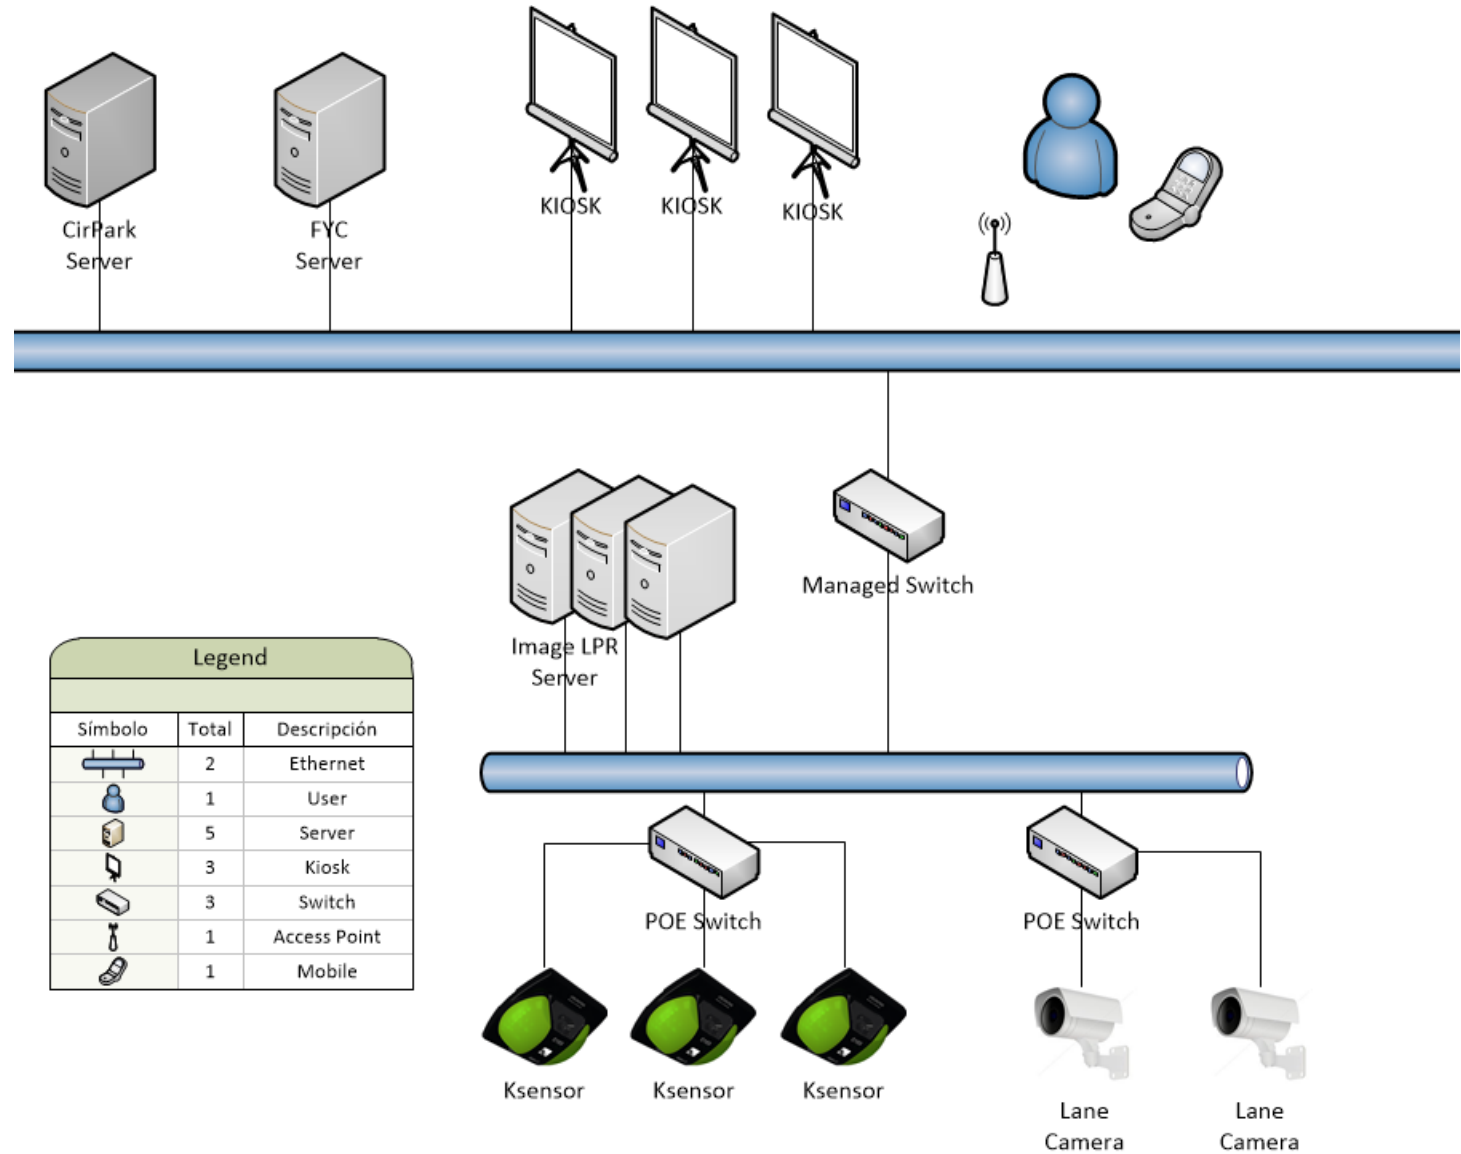

| Legend  |       |              |
|---------|-------|--------------|
| Símbolo | Total | Descripción  |
|         | 2     | Ethernet     |
|         | 1     | User         |
|         | 5     | Server       |
|         | 3     | Kiosk        |
|         | 3     | Switch       |
|         | 1     | Access Point |
|         | 1     | Mobile       |



# iPark / Find Your Car

## Camera based sensors

---

Ksensor  
460810



Camera-based sensor with a built-in indicator that arises from the need to integrate in a sensor device the image recognition technology thanks to the use of its two integrated cameras. Power Supply: DC 48V PoE Consumption: 5W Communications: Ethernet (RJ45) Extended Temperature Range -20 °C to +60 °C Remote configurable Firmware. Recommended Installation height between 2.2 and 2.5 meters. IP50 Protection

Ksensor CI  
460810CI



Camera-based sensor with a built-in indicator that arises from the need to integrate in a sensor device the image recognition technology thanks to the use of its one integrated camera. Power Supply: DC 48V PoE Consumption: 5W Communications: Ethernet (RJ45) Extended Temperature Range -20 °C to +60 °C Remote configurable Firmware. Recommended Installation height between 2.2 and 2.5 meters. IP50 Protection

FYC-LANECAM V  
460710V



Bullet Camera with autozoom 2.8-12mm and vandalproof for LPR by zone. 3MP resolution (H.264/H.265). IR cut filter with 60m range. External POE included. HD lens 1/2,9" SONY sensor CMOS low illumination. It works with FYC-FREEFLOW-1Z license.

## Terminal

---

FYC-KIOSK  
460722



FYC Kiosk, User Interface for Find Your Car system made with galvanic iron. 22" panoramic touch screen. 220Vca/100W power and Ethernet output.



## Control

FYC-HUB8POE  
460703



Gigabit PoE Switch with 8 PoE fast ethernet and 2 combo gibabit ports.  
Network redundancy, IP routing, QoS, VLAN support and PoE alarm.  
48Vdc Power supply with 48-55Vdc input range.  
-10 to 65°C Operating Temp Range.

FYC-SWITCH\_GIGABIT\_24P  
46020



Industrial Managed Gigabit Switch with 24 Gigabit Ethernet ports.

## Software

FYC-SERVER-DELUXE  
460790-1

High Featured Server for FYC image processing. Includes License Plate Recognition Program in FreeFlow mode. 16 cores equipment with i7 CPU or higher, 16GB RAM memory, 1TB HD and Windows 10 Pro.

FYC-SOFTWARE  
460750

Find Your Car Software that includes License Plate Recognition per zone and per parking space, interface management of the user kiosk and integration with CirPark.


FYC-LICENSE-LPR 1000bays  
460750-1

License Plate Recognition License valid for 1000/2000 bays.

FYC-LICENSE-LPR 2000bays  
460750-2

Software CirPark Scada  
610105

Car park management Scada software. Real-time management of the iPark family (counting, indoor/ outdoor guidance and vehicle localization), ledPark (regulated lighting control and energy efficiency) and evPark (control of electric vehicle recharging equipment). It allows the control of the occupation, to introduce the map of the installation, and create screens of visualization of the occupancy, crossing zones, statistics, reports, logic of operation and alarms. Software multiclient and cross-platform. Connection via multiplatform web browser or through Windows O.S. program. Integration via XML API. Mail server and RSS. Monitoring of IP cameras. Integration and monitoring of CO. License for unlimited number of parking spaces.

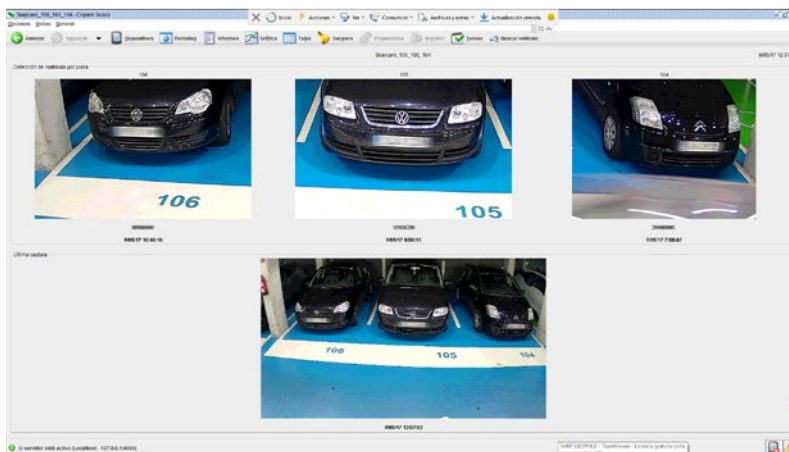



# LEDPark

Regulated LED Light system with LED technology, integrated with parking guidance and managed accordingly with real-time occupancy and pedestrian movements. Consumption reduction via Energy Efficiency management. Installation and Maintenance cost reduction thanks to its low power consumption and long-lasting equipment.



# Consumption reduction via Energy Efficiency management



## LED Park

Regulated LED Light equipment with low power consumption. Integrated into CirPark Platform for a full automatic and unattended control.




## Energy Efficiency

Consumption and Energy control with integrated management into CirPark Platform for eco-friendly LEED certification.

## Owner Benefits

Real parking data obtained by Official Laboratory

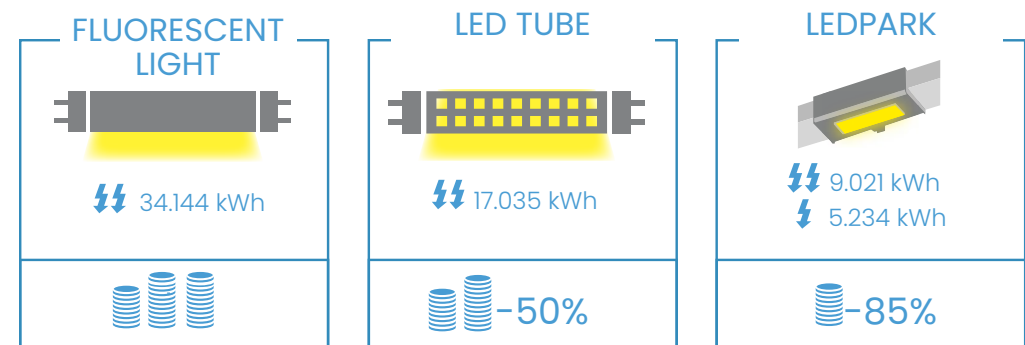

Less than 3 years of Return on Investment, giving high levels of illumination and reducing energy and maintenance costs.



## Lighting Modules

BL-Park-S  
460651



LED module, regulated, of the LED-park system. Maximum Consumption: 4W. Anchor bracket in iPark tray and built-in cooling plate. Connection via cable with connector.

DL-PARK-2  
460653



Power Driver for LED Lighting Control. Management Capacity 3 BL-PARK-S, with an output power of 3W per BL-PARK-S. 3 cable Input connection from Power supply 48Vdc and regulation from CL-PARK-2..

TCP3RS  
460803



Industrial RS-485 to TCP-IP Ethernet communication converter. RS-232/RS-485 opto-isolated port. Input power: 230 V AC. Consumption: 2 VA. DIN rail.

## Lighting Control

CL-PARK-2  
460802



Header controller of the LEDPark. Power control over voltage regulation 0-10V. RS485 output for control from CIRPARK Software. One module per power supply and for control of up to 30 DL-PARK series drivers.

PK-ENERGY KIT  
460188



Car park energy management kit. Can be used to manage and control the energy consumption of the car park. Kit made up of one CVM-MINI grid analyser + one three-phase measurement transformer. For new electrical cabinets installation.

PSC-480-48  
460603



Switched power supply. Input power: 230 V AC. Output voltage: 48 V DC. Power: 480 W. DIN rail.



KIT-PK-SAI-LED  
460614




Super Long Life UPS module Ni-MH (nickel-metal hydride). Includes PSC-57 constant current source and switching relay. Rated output voltage: 43.2V. Constant current load. Capacity for 400W charging load, equivalent to 1 hour of uninterrupted illumination with the LEDPark system. Extended Temperature Range. It allows communication with SCADA Software for battery status awareness.

PK-CP245  
460170



Blind aluminium tray, 48 mm wide and 2.45 m long.

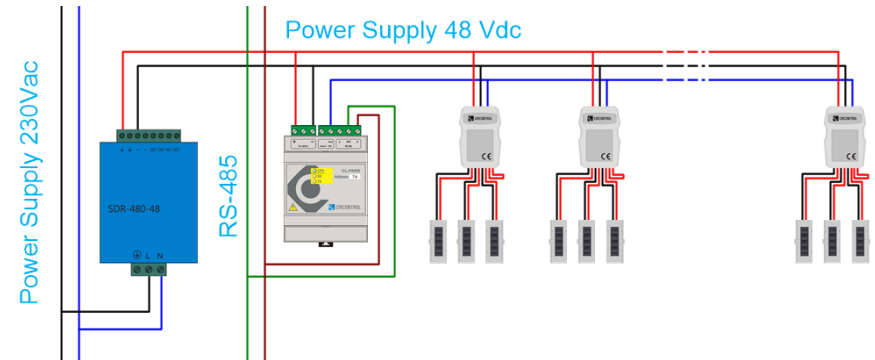



## Lighting Accessories

PK-TSS  
460172

T-shaped galvanised-steel accessory to install the SP sensor series.



PK-T  
460609

T-shaped galvanised-steel accessory without holes, to install the bilogy or trilogy in the LEDPark system.



PK-E  
460175

Galvanised-steel accessory for joining trays.



## Lighting Wiring

CB-PARK

Wiring unit for connecting DL-PARK-2 to each BL-PARK-S 2 x 0.50 mm<sup>2</sup>, including halogen-free connectors and wiring.



CB-PARK-60  
460605

60 cm wiring unit.

CB-PARK-80  
460605A

80 cm wiring unit.

CB-PARK-150  
460606

150 cm wiring unit.

CB-PARK-210  
460613A

210 cm wiring unit.

CB-PARK-500  
460613A

500 cm wiring unit.

CB-PARK-750  
460615

750 cm wiring unit.

C-BL  
460607

100-m Halogen-free power and control-signal wiring for the DL-PARK systems installed: 2 x 6 mm<sup>2</sup> + 1 x 0.34 mm<sup>2</sup>. To be used from electrical cabinet until first driver.




C-LH4  
460117

100-m halogen-free hose-cable extending the row of devices. 2 x 1.5 mm<sup>2</sup> power cable + 2 x 0.34 mm<sup>2</sup> twisted and shielded cable for the RS-485 bus. To be used between drivers.



## Electric diagram LEDPark System with the kit PK SAI LED

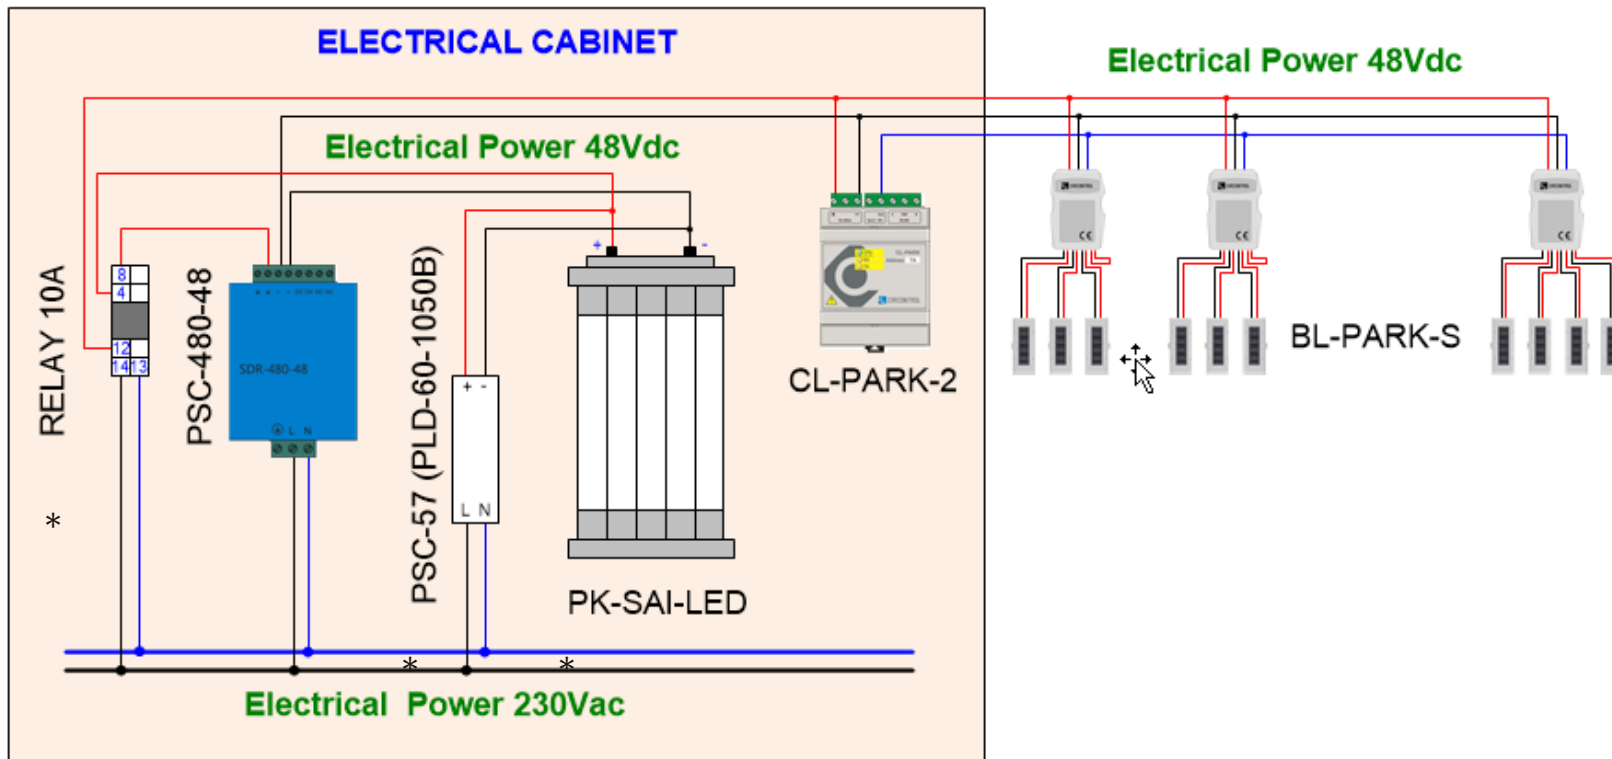

\* Included in KIT-PK-SAI-LED



# EVPark

EVPark is Circontrol's solution for Electric Vehicle (EV) charging in indoor and outdoor parking facilities.

# Charging in indoor and outdoor parking facilities



## Electrical vehicle chargers

EVPark offers a wide range of EV chargers; wall/ground mount, slow/quick charging, and single/double socket.  
For indoor/outdoor facilities.

OCPP

## OCPP

To ensure a friendly operation of the chargers by the users and a profitable business model for the parking operator, EVPark solutions use OCPP (Open Charge Point Protocol), widely extended in the Electro-Mobility business.



## DLM

The Dynamic Load Management (DLM) system can be integrated with CirPark Platform, offering the most complete solution currently available on the market. DLM system ensures that only the available power of the installation is used, thus maximising its efficiency and avoiding the high cost of its power upgrading.



## Charge Point integrated with PMS

A complete procedured solution provided to Parking Management Systems manufacturers to integrate EV Charge Points into their own payment system.



## Park&Charge

Ticketless payment system allows the user to charge an electric vehicle without the need to print any ticket. The reading and recognition of the license plate using the FYC system will be enough to allow charging the vehicle automatically.





## EV Charge Stations Indoor

Interface Protocol OCPP 1.6J, 2.0.1 Ready. Enclosure Rating: IP54/IK10. Operating Temperatures: -5 to +45 °C (50 for eVolve). Display: Multi-language LCD for eNext Park and eVolve (3.5" Color for eNext Elite). RFID: eVolve ISO/IEC 14443 A/B, FeliCa & ISO/IEC 15693/ICODE; eNext Park: ISO/IEC 14443 A/B, MIFARE Classic/DESFire EV1 & ISO 18092/ECMA-340; eNext Elite: same as Park + NFC 13.56 MHz, FeliCa, ISO/IEC 15693 and ISO/IEC 18092.

eVolve Smart S / T  
WVS0036411 (S)  
WVS0036413 (T)



Indoor EV Charger with:

- Dual Socket Type 2
- Single phase (S) / Three phase (T)
- Up to 32 A in 2 x 7,4 kW output format (S)
- Up to 32 A in 2 x 22 kW output format (T)
- Charging Mode: Mode 3

eNext Park S/T/S Two  
S: WNP0032011  
T: WNP0032013  
S Two: WNP0064011



Indoor EV Charger with:

- Socket Type 2
- Single phase (S) / Three phase (T)
- Up to 32 A in 1 x 7,4 kW output format (S)
- Up to 32 A in 1 x 22 kW output format (T)
- Up to 32 A in 2 x 7,4 kW output format (S Two)
- Charging mode: Mode 3

eNext Elite  
S: WNC00032011  
T: WNC00032013




Indoor EV Charger with:

- Socket Type 2
- Single phase (S) / Three phase (T)
- Up to 32 A in 1 x 7,4 kW output format (S)
- Up to 32 A in 1 x 22 kW output format (T)
- Charging mode: Mode 3

## DLM (Dynamic Load Management)


### ▶ WITHOUT DYNAMIC LOAD MANAGEMENT

Main Supply Overload

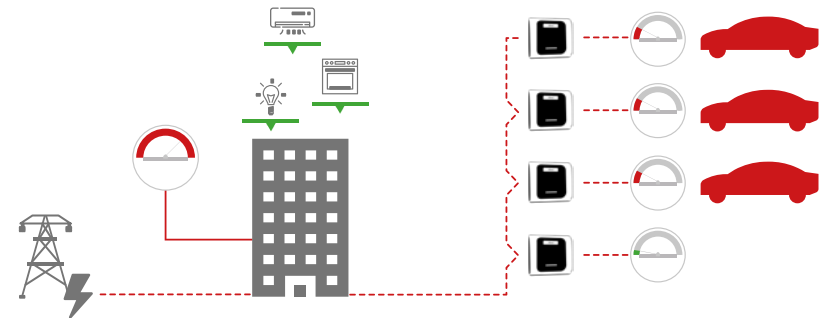

### ▶ WITH DYNAMIC LOAD MANAGEMENT

Main Supply protected

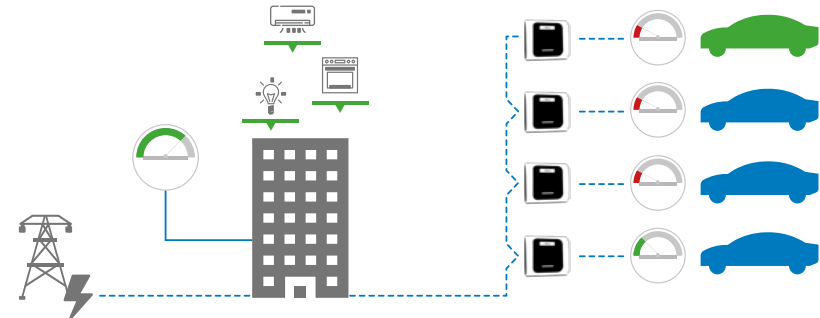

# EV Charge Stations Outdoor

Interface Protocol OCPP 1.6J, 2.0.1 Ready. Enclosure Rating: IP54/IK10. Enclosure material: Aluminium & ABS. Enclosure door lock. Operating Temperatures: -5 to +50 °C. Display: Multi-language LCD. RFID: ISO/IEC 14443 A/B, FeliCa & ISO/IEC 15693/ICODE. Dimensions: 450mmx290mmx1550mm.

Post eVolve smart T  
PVS00364011

Outdoor EV Charger with:

- Dual socket Type 2
- Single phase
- Up to 32 A in a 2 x 7,4 kW output format
- Charging mode: Mode 3 PCB

Post eVolve smart S  
PVS00364013

Outdoor EV Charger with:

- Dual socket Type 2
- Three phase
- Up to 32 A in a 2 x 22 kW output format
- Charging mode: Mode 3 PCB


Post eVolve smart TM4  
PVS000640B3

Outdoor EV Charger with:

- Dual socket Type 2 + Dual CEE/7
- Three phase
- Up to 32 A in a 2 x 22 kW output format
- CEE/7 up to 16 A in a 2 x 3,7 kW output format
- Charging mode: Mode 3




# OCPP Integration

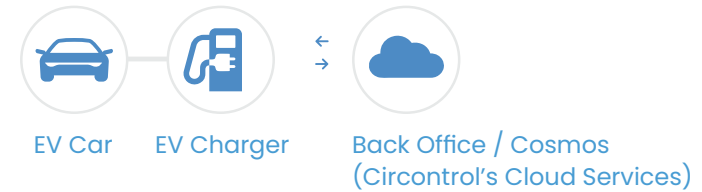

# Charge Point Integration

## Rotation Users

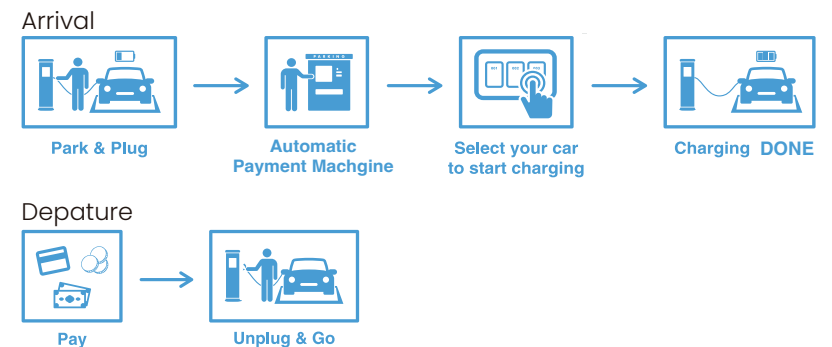

## Subscribed Users



# // Solutions for Efficient Parking



Circontrol has a network of distributors and representative agents all over the world. For further information please contact:

Headquarter Address:  
C/ Innovació, 3 Industrial Park Can Mitjans  
08232 Viladecavalls (Barcelona), Spain

Phone: (+34) 937 362 940  
Fax: (+34) 937 362 941  
Mail: [circontrol@circontrol.com](mailto:circontrol@circontrol.com)  
V2.4